



Desktop Printers

G500 Series

High-Tech Power with a Customer Friendly Price

"Twin-Sensor Technology" makes the G500 perfect for printing on all types of specialty materials especially for retail and industrial applications



300 meter ribbon plus the optional label stand provides maximum printing volume



"Twin-Sensor" technology allows you to use a broad range of labels



Available interface combinations include:
☐ USB2.0, Serial and Ethernet
☐ USB2.0 and Parallel



Strong and stable mechanism design for long term reliability



PT. Mitra Nippon Printing Indonesia

Kawasan Industri Multiguna 2, Jalan Tanjung No. 3-5, Cikarang Selatan 17530, Indonesia.

+ 62-21 897 5719

info@mnpiindonesia.com

www.mnpiindonesia.com



G500 Series Printer Specification

2024-03-13

Model	G500		G530	
Print Method	Thermal Transfer / Direct Thermal			
Resolution	203 dpi (8 dots/mm)		300 dpi (12 dots/mm)	
Print Speed	5 IPS (127 mm/s)**		4 IPS (102 mm/s)**	
Print Width	4.25" (108 mm)		4.16" (105.7 mm)	
Print Length	Min. 0.16" (4 mm)** Max. 68" (1727 mm)		Min. 0.16" (4 mm)** Max. 30" (762 mm)	
Processor	32 Bit RISC CPU			
Memory	8MB Flash (4MB for user storage) ; 16MB SDRAM			
Sensor Type	Adjustable reflective sensor. Fixed transmissive sensor. Central aligned			
Media	Types : Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming			
	Width : 1" (25.4 mm) Min. - 4.65" (118 mm) Max.			
	Thickness : 0.0024" (0.06 mm) Min. - 0.01" (0.25 mm) Max.**			
	Label Roll Diameter : Max. 5" (127 mm)			
	Core Diameter : 1" (25.4 mm), 1.5" (38.1mm), 3" (76.2mm)			
Ribbon	Types : Wax, wax / resin, resin			
	Length : 984' (300 m)			
	Width : Min. 1.18" (30 mm) – Max. 4.33" (110 mm)			
	Ribbon Roll Diameter : 2.67" (68 mm)			
	Core Diameter : 1" (25.4 mm)			
Printer Language	EZPL, GEPL, GZPL, GDPL auto switch			
Software	Label design software: GoLabel II (for EZPL only) (Windows)			
	Management tools: GoTools (Windows / Android), GoUtility (Windows)			
Driver	Satin ribbon printing tool: GoRibbon (Windows)			
	Windows 7, Windows 8 & 8.1, Windows 10, Window11, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, 2022, MAC, Linux			
SDK	Win CE, .NET, Windows 7, Windows 8 & 8.1, Windows 10, Windows 11, Android, Mac, iOS			
Resident Fonts	Bitmap fonts: 6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B			
	0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable			
	8 times expandable in horizontal and vertical directions			
	TTF Fonts: (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable			
Download Fonts	Bitmap fonts: 0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable			
	Asian fonts: 16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese(GB2312), Japanese(S-JIS), Korean (KS-X1001)			
	0°, 90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions			
	TTF fonts: TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable			
Barcodes	1-D Bar codes:			
	China Postal Code, Codabar, Code 11, Code 32,Code 39, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5 , Interleaved 2-of-5 (I 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart, Random Weight and Pharmacode			
	2-D Bar codes:			
	Aztec code, Code 49,Codablock F , Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417,QR code, TLC 39, GS1 Composite, DotCode, Marco PDF 417			
	Codepage 437, 737,850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869			
Code Pages	Windows 1250, 1251, 1252, 1253, 1254, 1255, 1257			
	Unicode UTF8, UTF16BE, UTF16LE			
Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software				
Graphics				
Interfaces	USB 2.0 (Type B)		USB 2.0 (Type B)	USB 2.0 (Type B)
			Serial port (RS232)	Serial port (RS232)
			Ethernet 10/100 Mbps	Ethernet 10/100 Mbps
Real Time Clock	N/A			
Control Panel	Two bi-color status-LEDs: Ready, Status			
Power	Control key: FEED			
	External auto switching power supply			
	Input: AC 100-240V, 50-60Hz			
Environment	Output: DC 24V, 2.5A			
	Operation temperature: 41°F to 104°F (5°C to 40°C)			
	Storage temperature: -4°F to 122°F (-20°C to 50°C)			
Humidity	Operation: 30-85%, non-condensing.			
Agency Approvals	Storage: 10-90%, non-condensing.			
	CE (EMC), FCC Class A, CB, cULus, ICES-003, UKCA, BSMI, CCC, KC, BIS, ENERGY STAR ***			
	Length: 285 mm (11.2")			
Dimension	Width: 232 mm (9.13")			
	Height: 173 mm (6.81")			
Weight	2.5 Kg (5.51 lbs), excluding consumables			
Options	Cutter			
	Label Dispenser			
	External label roll holder for 10" (250 mm) O.D. label rolls			
	External label rewinder			

* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

** Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. Godex is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

*** The safety certification marks may be different depending on sales regions.

Applications

Applications for Labels & Barcodes

G500 series is your best friend for getting the job done instantly.



Retail

Pricetags, content labels, receipts for registered mails, postage labels, etc.

Warehouses, Logistic & Transportation

Casepack labels, address labels, product serial number labels, inventory management, shipping labels, or related industrial applications.

Administration

ID cards, document and records management, access control management, library management & organization and classification system, ISBN application, etc.

JPN Series Ribbons

DNP offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge




GoDEX

LABEL DESIGN SOFTWARE

GoLabel II Software / User Friendly

GoLabel II is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel II is the first-choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel II to experience it!

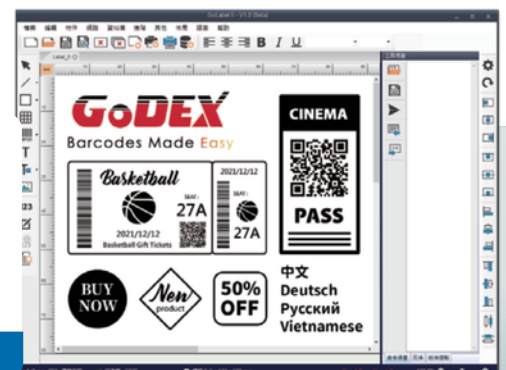

PT. Mitra Nippon Printing Indonesia

Kawasan Industri Multiguna 2, Jalan Tanjung No. 3-5, Cikarang Selatan 17530, Indonesia.

+ 62-21 897 5719

info@mnpiindonesia.com

www.mnpiindonesia.com